



Exterior Elevation




section side view

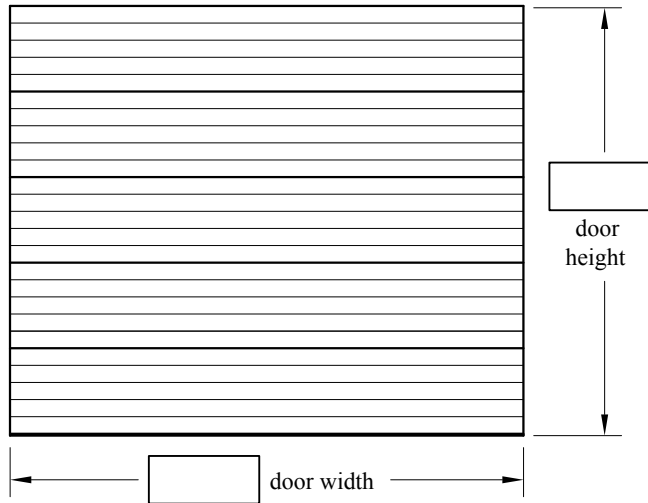

Interior Elevation

height	sections
6'-3" to 8'-0"	4
8'-3" to 10'-0"	5
10'-3" to 12'-0"	6
12'-3" to 14'-0"	7
14'-3" to 16'-0"	8
16'-3" to 18'-0"	9
18'-3" to 20'-0"	10

width	panels
8'-0" to 9'-5"	2
9'-6" to 12'-11"	3
13'-0" to 16'-5"	4
16'-6" to 18'-2"	5
16'-6" to 20'-2"	5
20'-3" to 24'-2"	6

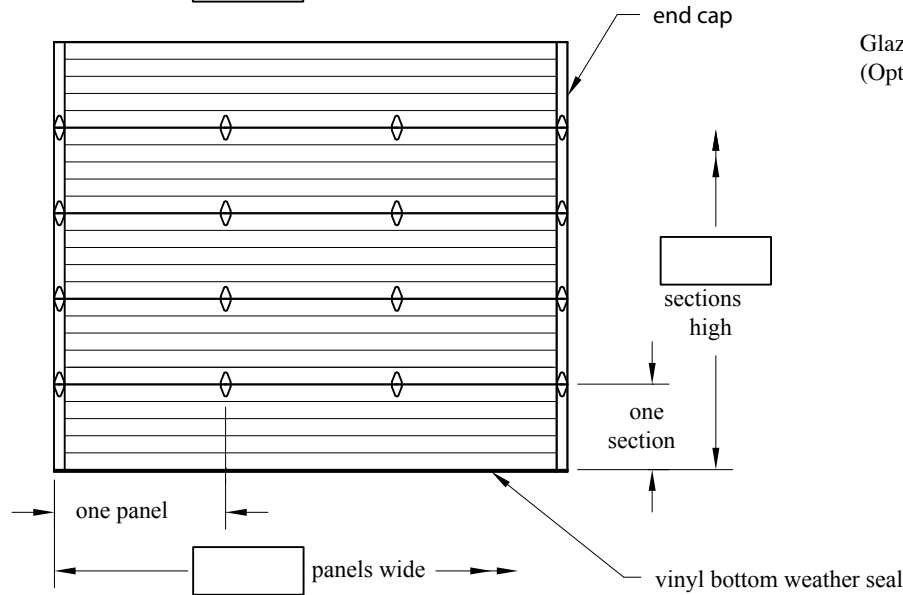

Panel Material: 20 gauge exterior/27 gauge interior

Color: Exterior: Polyester top coat over primer
 White RAL Powder-coat
 Interior: White polyester primer coat.

Section Thickness: 2"

Panel Profile: Wood grain embossed exterior with four micro-grooves; wood grain flush interior.

Joint Design: Tongue and groove rails with full thermal break.

End Cap: 20 gauge white painted galvanized steel, full height of section.

Insulation: 95% closed cell urethane, CFC free polyurethane core
 Average R-Value of 17.54; U-value of 0.057

Glazing (Optional)
 24" x 6" x 1" Insulated Glass (Clear, Tempered or Tinted)
 24" x 12" x 1" Insulated Glass (Clear, Tempered or Tinted)
 34" x 16" x 1" Insulated Glass (Clear, Tempered or Tinted)
 (3/4"x16" N/A in End Panels on 10', 14', 18', 22' wide doors)

Optional Aluminum Full View Frame to match size and panel layout of steel section. (white, clear or powder-coat)
 (Optional open for field glazing, 1/8" DSB, 1/8" polycarbonate, 1/8" tempered glass, 1/4" tempered glass, 1/2" insulated glass or 1/2" tempered insulated)



Salem Door.
 2120 Stapleton CT
 Forest Park, OH 45240.
 Tele: (513) 552-3000 Fax #: (513) 552-3006
 EMAIL: sales@SalemDoor.com

04/2016 Copyright 2016 C.H.I. Overhead Doors

Door Qty	Door Width	Door Height	Jamb Type	Model	Exterior Color

Miscellaneous Notes

C.H.I.
 OVERHEAD DOORS
 1485 Sunrise Drive, Arthur, IL 61911
 TOLL FREE: 800-677-2650 FAX: 217-543-3087

C.H.I. Model 3212: Micro-Grooved Polyurethane Sandwich Door			
ARCHITECT:			
CONTRACTOR:			
PROJECT NAME:			
DOOR COMPANY:			
QUOTE NUMBER:		DOOR NUMBER:	
PREPARED BY:		DATE:	